

Village of Prairie du Sac

2020 LOCAL STREET IMPROVEMENTS

PUBLIC INVOLVEMENT MEETING #1 – 12.19.2019

Project Overview


- 6th Street, 7th Street, 7th Street, and 8th Street



Project Overview

- Forest Subdivision
 - Woodland Trail, E Woodland Trail, W Woodland Trail, Forest Glenn Cir, Highland Trail, Highland Ct, White Pine Ct, and Red Pine Ct



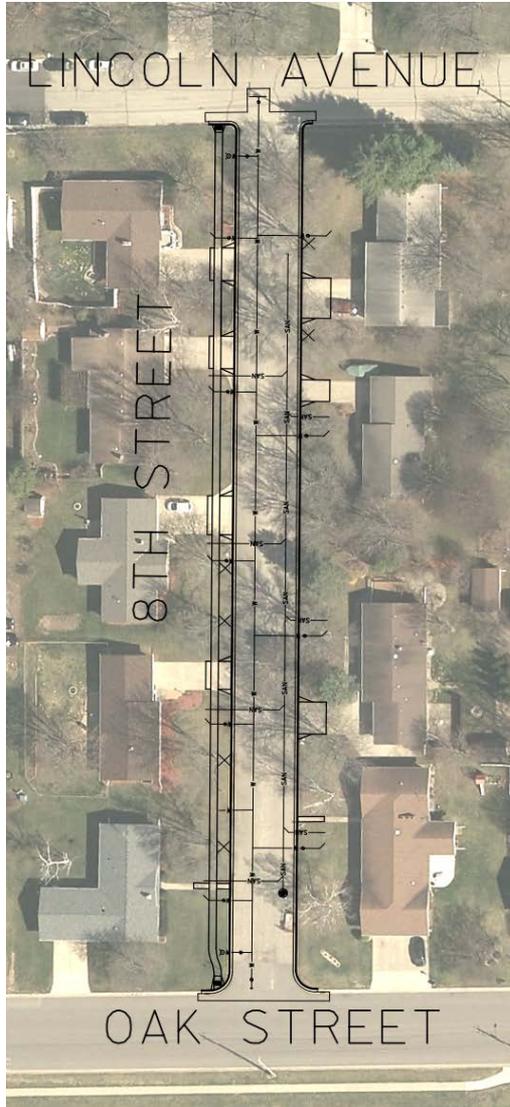

8th Street – Oak Street to Lincoln Avenue

- 500 LF of Roadway Reconstruction
- Reconstruction of the curb and gutter, road base, and asphalt pavement
- Replacement of water main, water services, light poles, and spot replacement of sanitary sewer
- New Sidewalk on the west side of 8th Street
- Removal of existing trees that are in poor health or conflict with the project



7th Street – Oak Street to Lincoln Avenue

- 500 LF of Roadway Reconstruction
- Reconstruction of the curb and gutter, road base, and asphalt pavement
- Replacement of water main, water services, and light poles
- New Sidewalk on the west side of 7th Street
- Removal of existing trees that are in poor health or conflict with the project



7th Street – Ray Street to Grand Avenue

- 350 LF of Roadway Reconstruction
- Reconstruction of the curb and gutter, road base, and asphalt pavement
- Replacement of water main, water services, and light poles
- New Sidewalk on the east side of 7th Street
- Removal of existing trees that are in poor health or conflict with the project



6th Street – Ray Street to Grand Avenue

- 350 LF of Roadway Reconstruction
- Reconstruction of the curb and gutter, road base, and asphalt pavement
- Replacement of water main, water services, and light poles
- New Sidewalk on the east side of 6th Street
- Removal of existing trees that are in poor health or conflict with the project



Why Sidewalks?

- Village policy to construct sidewalks along any existing public street when it is reconstructed.
- Pedestrian mobility and safety
- Placement of sidewalk is based on street's functional classification.
- For minor residential streets, sidewalks shall be installed on one side of street (north or west sides unless conflicts exist such as utilities, grades, or right-of-way restrictions).



Forest Subdivision

- Rehabilitation of 4,600 LF Roadway beginning at Prairie Street
- Pulverize existing roadway, spot replace existing road base and curb and gutter, new asphalt pavement
- Spot replace existing sidewalk in poor condition and replace curb ramps

Forest Subdivision Driveway/Curb Transitions



Standard



Non-Standard

Impacts During Construction

- Access to Driveways
 - Access to driveways overnight except after concrete pours (curb, sidewalk, and driveway)
- Garbage
 - Garbage and recycling collection will continue as normal
- Mail Delivery
 - Likely as normal - mail delivery will be coordinated with Postal Service prior to the start of the project
- Water Outages
 - Water outages will occur during water main connections and new water service connections
 - Residents will be notified in advance when a scheduled water outage is to take place
- Items within City Right-of-Way
 - Items within the village right-of-way (landscaping, trees, fences, lawn ornaments, etc.) are subject to removal/or damage
 - Please move the items prior to construction

Special Assessments

- No assessments for sidewalk or curb replacement
- Village policy is to assess property owners for driveway and carriage walks
 - Property owners have input into whether or not their carriage walks are replaced
- Assessment letters with estimates will be sent to property owners when design is complete


Project Schedule

- Design
 - December-February
- Project Bidding/Award
 - February/March
- Construction (tentative)
 - April-August

Questions and Comments

- Questions
 - Do you want to keep your carriage walk?
 - Do you plan to replace your sanitary lateral during the project?

- Additional comments, thoughts, or ideas?

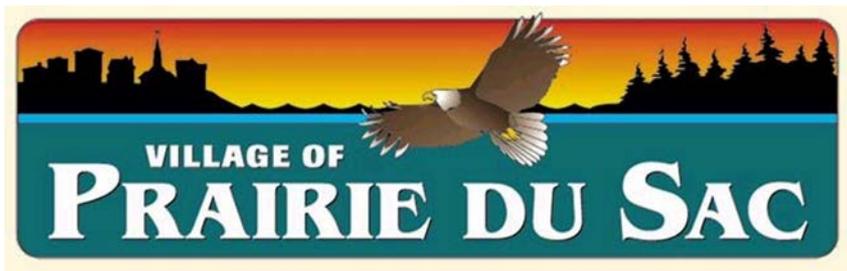

Village of Prairie du Sac

2020 LOCAL STREET IMPROVEMENTS

PUBLIC INVOLVEMENT MEETING #1 – 12.19.2019